


DETAIL 1

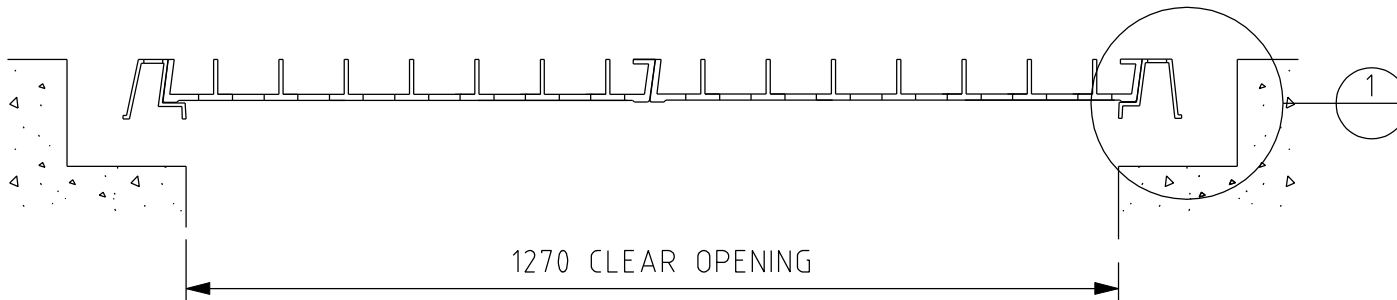

CONCRETE MUST FULLY SUPPORT THE FRAME ALL THE WAY TO THE INSIDE EDGE OF THE FRAME  
 CONCRETE STRENGTH MUST BE A MINIMUM STRENGTH OF 32 MPA  
 ENSURE CONCRETE IS FREE OF VOIDS  
 SCREED OFF CONCRETE TO A NEAT FINISH (COVER RIBS AND EDGES SHOULD BE VISIBLE)  
 ALLOW 24 HOURS TO CURE BEFORE ATTEMPTING TO REMOVE ANY COVERS

3		
REV:	DATE:	REVISION DETAILS:

HAVESTOCK PTY. LTD  
 452 NEWMAN ROAD GEEBUNG (07) 3216 5000

CLASS D 2 PART COVERS  
 ACCESS COVER AND FRAME

HAV- D214