




Water Troughs

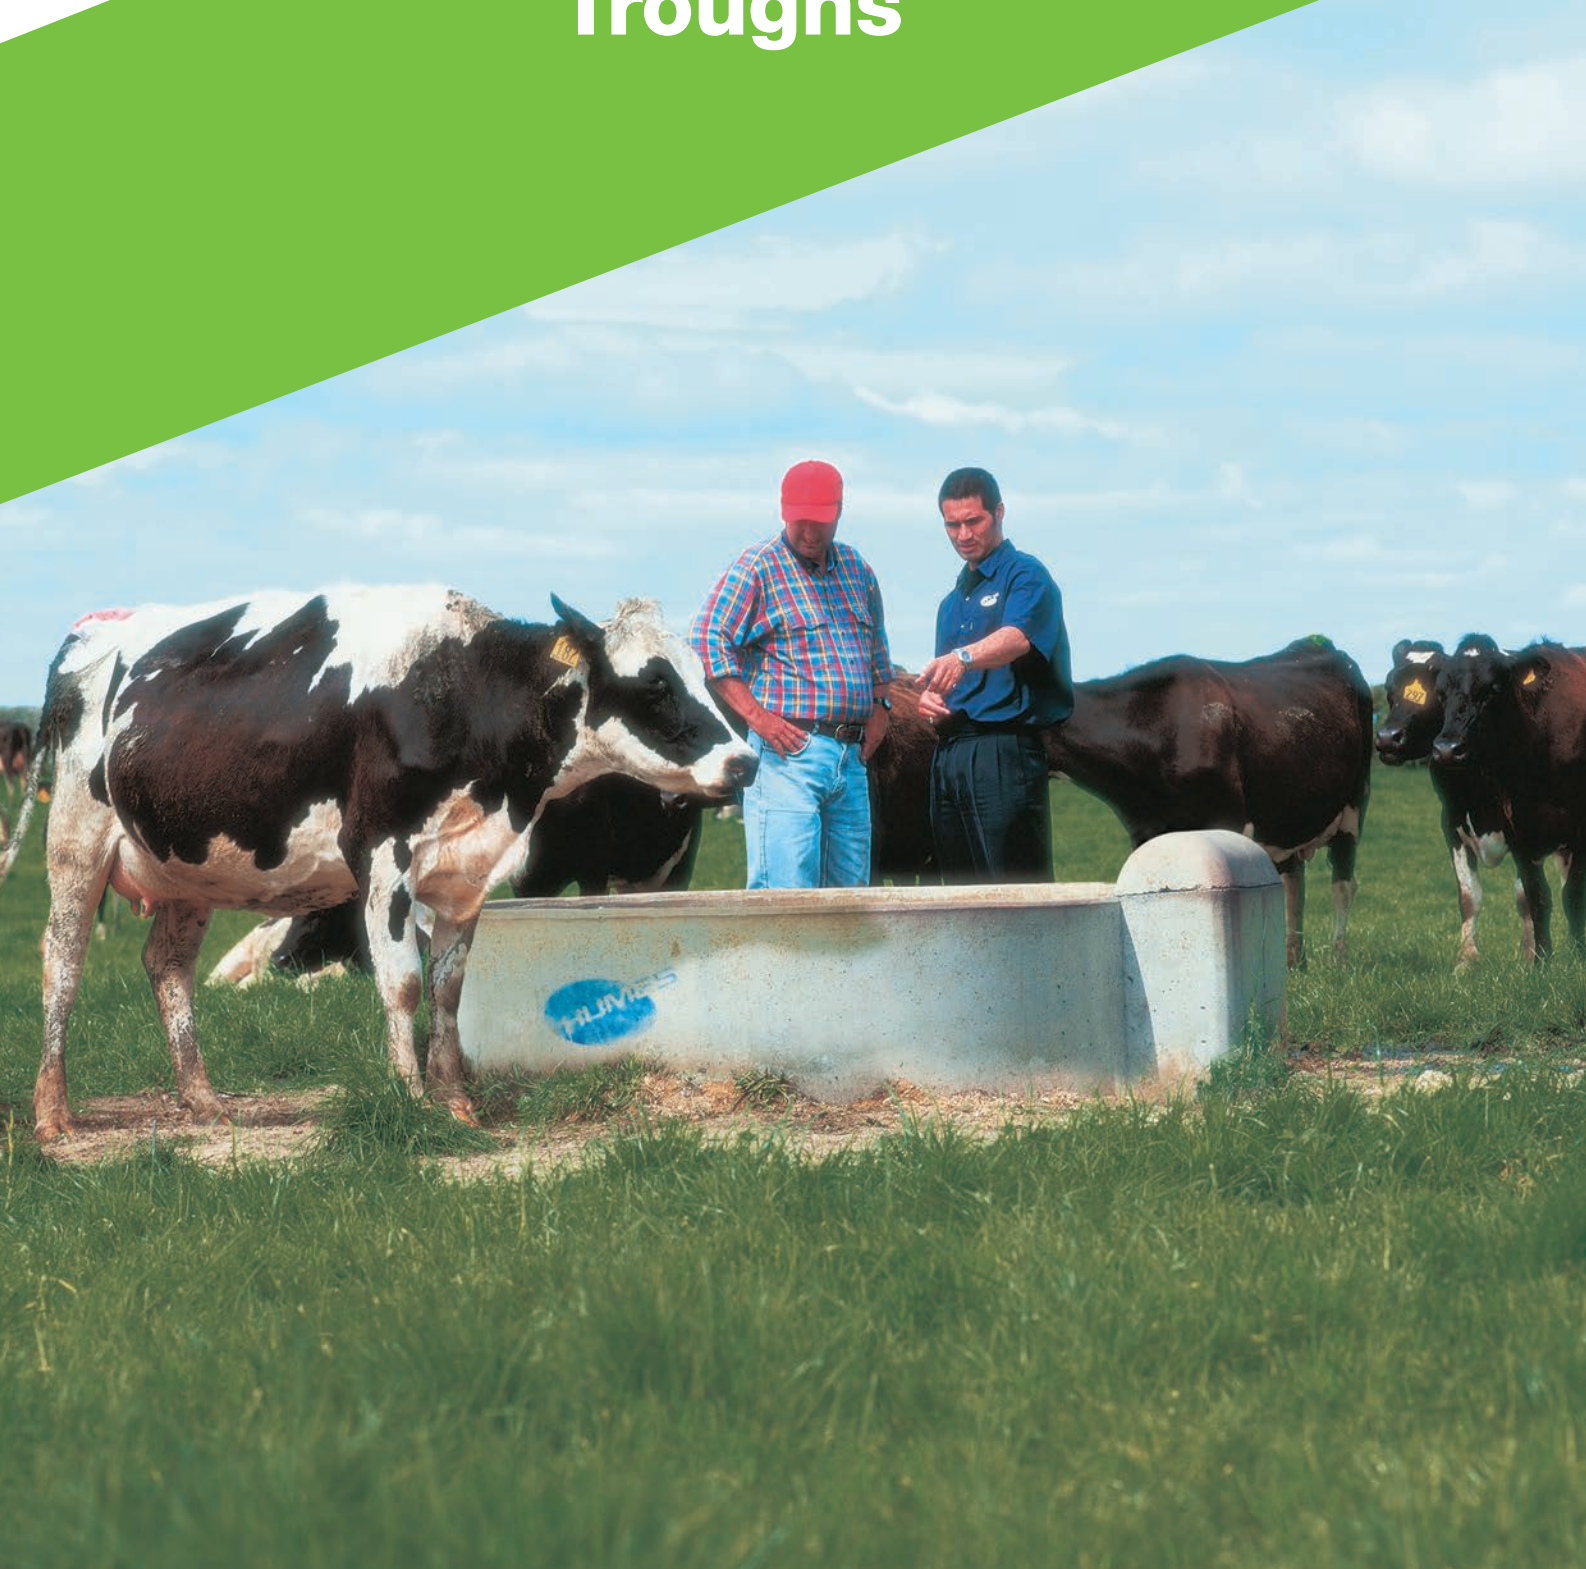

Quality, tough, stock-proof
farm troughs you can rely on.

Water Troughs

Hume's reinforced concrete troughs are manufactured to a high standard and have proven durability/longevity on the farm. They have been designed to answer many of the problems facing farmers by conventional watering systems and are available in a variety of types and sizes to suit most applications on the farm.

Fittings protected from stock damage. The ballcock is housed in a separate chamber with a concrete cover. The water supply connection is under the trough which prevents damage to the supply line and fittings. The pipe that feeds the ballcock, runs up inside the wall of the trough to keep it protected from stock.

Back-siphoning prevented – the very nature of the Hume's trough design makes it impossible to get a back siphoning situation. This is a common problem with a number of stock water systems, especially on hilly terrain. Ultimately, negative pressure can cause water to be sucked from the trough back through the pipeline and water tank, which can contaminate the house drinking water.


CT troughs are available in 500, 750, 1000 and 1500 litre.

If you require the quality and durability of the Humes troughs range this product is a good alternative to our more advanced CB range of troughs. Currently the CT trough is available in the North Island only.


Features and benefits of Humes troughs include:

The top edge is curved to prevent injury to stock. All troughs have been fully reinforced with steel fibres to give them the strength and durability required on the farm. The lamb steps are supplied standard on RB300 & RB400 rectangular troughs. To give easy access for maintenance the ballcock valve is mounted above the water.


Concrete Water Trough range




CB 100
Lifestyle




CB 500 - 2500
Cattle



CT 500 - 1500
Cattle



RB 200
Double-ended trough
Sheep



RB 300/400
trough
Sheep

	CB 100	CB 150	CB 500	CB 750*	CB 750	CB 1000	CB 1500	CB 2500	CT 500	CT 750	CT 1000	CT 1500	RB 200	RB 300	RB 400	Pig Feed	Goat Water
Item Code	05500	05501	05502	05456	05503	05504	05505	05506	05512	05513	05511	05508	05519	05520	05521	05525	05528
Capacity (litres)	100 (22gal)	150 (33gal)	500 (110gal)	750 (165gal)	750 (165gal)	1000 (220gal)	1500 (330gal)	2500 (550gal)	500 (110gal)	750 (165gal)	1000 (220gal)	1500 (330gal)	200 (44gal)	300 (66gal)	400 (90gal)	83 (18gal)	167 (37gal)
Length (mm)													1300	1900	2740	1000	2000
Width (mm)	800	900	1694	2024	2024	1857	2235	2749	1394	1724	1554	1935	710	650	650	400	400
Diameter (mm)	1300	1000	1484	1794	1794	1634	2000	2500	1484	1794	1634	2000					
Depth (mm)	380	400	380	380	380	600	600	600	380	380	600	600	380	380	380	230	230
Approx Weight* (kg)	240	300	580	680	680	1000	1230	1600	475	575	800	1100	280	390	530	70	150
Fitting Size (mm) (threaded inlet)	20	20	25	25	20	25	25	25	20	20	25	25	20	20	20		

*Trough has an extra 25mm bottom entry fitting. Available in Otago and Southland regions only.

Notes

- Ballcocks are sold separately
- Water troughs, pipes, fittings and valves are all sold separately
- CT diameter is the circular size
- CT troughs not manufactured in the South Island but can be ordered on request

Applications


All stock water applications such as dairy, sheep, beef, horse, pig and goat.

Standards


Humes troughs are manufactured to a high quality standard.

For further information or advice freephone 0800 502 112 or visit www.humes.co.nz

Buyers and users of the products described in this brochure must make their own assessment of the suitability and appropriateness of the products for their particular use and the conditions in which they will be used. All queries regarding product suitability, purpose or installation should be directed to the nearest Humes Sales Centre for service and assistance. Fletcher Concrete and Infrastructure Limited 2013. Printed 12/13.

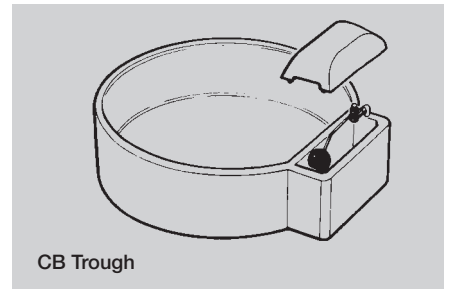

CB Trough

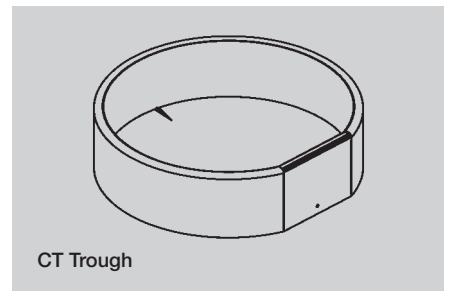

CT Trough

