

Composite Access Covers

Product Description

Humes' composite access covers are manufactured from SMC (sheet moulded compound) with high glass fibre content to ensure the required loadings are met. Available in standard sizes to fit on concrete and Humes Modular Access Chambers, with security locking and network logo plates as options.

Purpose

Humes' composite access covers are ideal for off road pathway installation on network access chambers infrastructure installations.

The lack of any inherent scrap value and light weight material makes these covers the perfect choice for and health & safety conscious network owners.



Specification

Material: SMC (sheet moulded compound)
Maximum Resin Content: unsaturated polyester resin 30% – 40%
Minimum Glass Content: non-alkali & non twist roving 30% – 40%
Maximum Filler Loading: ore powder & mixing fillers 30% – 40%
UV Protection: applied

Standards

AS3996:2006 Access Covers and Grates – SAI Global License No: SMKP21445 – Class B
AS3661.1:1993 Appendix A Slip resistance of Pedestrian Surfaces – Opus Christchurch
Telecom Network Specified Product – approved

Installation Guidelines

Full guidelines are available for download from the Humes website: www.humes.co.nz
Installation booklets are also available from all Humes Pipeline Systems branches

Product Dimensions

Item Number	Clear Opening (mm)	Frame Width (mm)	Cover Width (mm)	Frame Depth (mm)	Cover Depth (mm)	Weight (Set) (kg)
90818	600 x 750	908	794	758	644	31.5


Disclaimer: Buyers and users must make their own assessment of our products under their own conditions for their own use. All queries regarding product suitability or purpose or installation should be directed to the nearest Humes office for advice and assistance. Availability of product may differ slightly from that available in your area. © Copyright Humes Pipeline Systems 2009.

Freephone 0800 502 112 www.humes.co.nz




Composite Access Covers

Frame

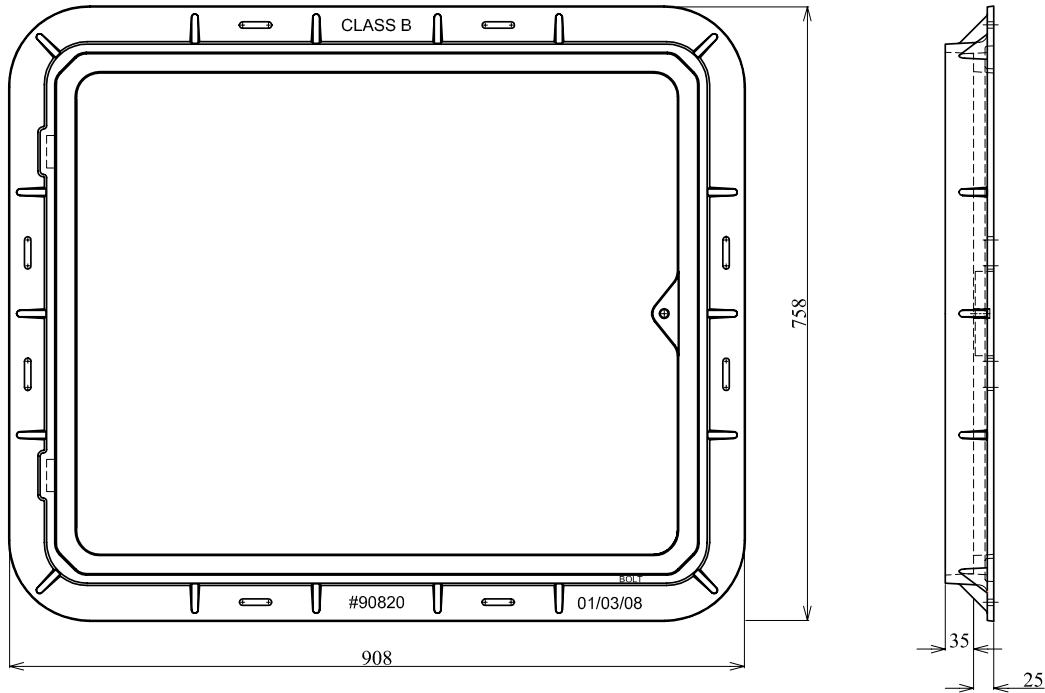

Cover

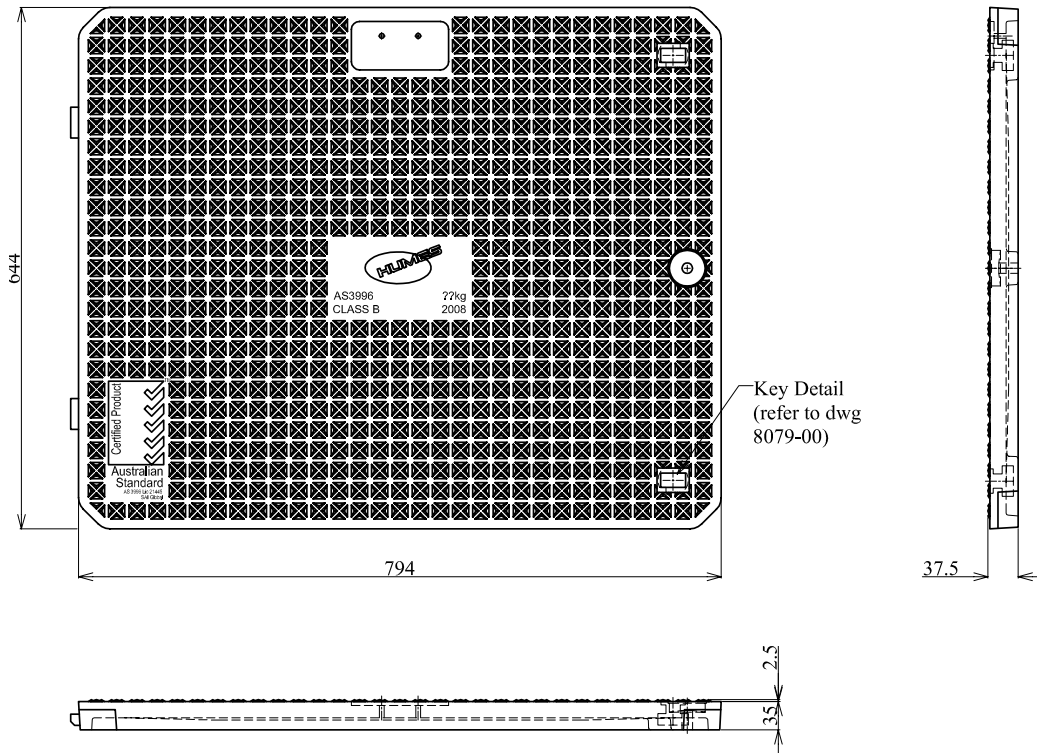

Disclaimer: Buyers and users must make their own assessment of our products under their own conditions for their own use. All queries regarding product suitability or purpose or installation should be directed to the nearest Humes office for advice and assistance. Availability of product may differ slightly from that available in your area. © Copyright Humes Pipeline Systems 2008.

Freephone 0800 502 112 www.humes.co.nz

